


# AQUA-BASIC

WATER FILTER



**Sanosil Ltd.**

Eichtalstrasse 49 CH-8634 Hombrechtikon Switzerland  
Phone: +41 55 254 00 54 Fax: +41 55 254 00 59 e-mail: [info@sanosil.com](mailto:info@sanosil.com)



# AQUA-BASIC WATER FILTER

## *AQUA-BASIC:*

**AQUA-BASIC** is composed of a filter housing with automatic deaeration and a by-pass switch. The **AQUA-BASIC** filter housing is designed to hold the standard AQUA-filters described below. The AQUA-filter can be replaced in a very simple way.


### SPECIAL NYLON FILTERS (WASHABLE) C-319000

- **Aptitude:**  
These filters are suited for the retention of particles (mechanical contamination).
- **Sizes available:** 60μ
- **Material:** acetate
- **Flow rate:** 2'500 l/h
- **Life span:** approx. 12 months



### WASHABLE POLYESTER FILTERS C-320001/2/3/4/5

- **Aptitude:**  
These filters are suited for the retention of particles (mechanical contamination) and, the smallest types, for the retention of micro-organisms.
- **Sizes available:** 0.35μ, 1μ, 5μ, 20μ, 50μ
- **Material:** polyester
- **Flow rate:** 100, 300, 726, 1250, 1700 l/h
- **Life span:** approx. 12 months

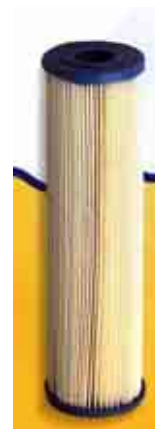

### ACTIVATED CARBON FILTER A-71820

- **Aptitude:**  
These filters are suited for the retention of heavy metals, odours and chemical substances.
- **Material (2 variants):** 1.) activated carbon or 2.) activated carbon and KDF®
- **Flow rate:** 240 l/h
- **Life span:** approx. 12 months



## **SILICON-PHOSPHATE FILTER A-72000**

- Aptitude:  
Prevention of calcareous deposits and corrosion.
- Material: silicon-phosphate
- Flow rate: 700 l/h
- Life span: approx. 12 months



**Maintenance:** **AQUA-BASIC** is designed to operate for years with a minimum of maintenance and an easy handling.

**Technical data:** **GENERAL SPECIFICATIONS**

- Connection: 3/4"
- Pressure loss: 0.2 bar
- Max. working pressure: 8 kg/cm<sup>2</sup>
- Max. water temperature: 60°C
- pH-range: pH 3-11
- Dimensions: length: 350 mm  
diameter: 115 mm
- Weight (housing): 0.9 kg
- Colour of housing: White

**Operating instructions:** SANO 33/e

**Distribution:** SANOSIL Ltd., Eichtalstr. 49, CH-8634 Hombrechtikon, Switzerland

Our operating instructions both oral and written are based on extensive tests. Our advice is given to the best of our existing knowledge but is not binding insofar as their application and the storage conditions lie beyond our direct control. The description of the products and details of the properties of the compounds do not subsume any liability for damage. Otherwise, our usual conditions of delivery and payment apply.